


Hydraulic Dock Leveller with Telescopic Lip • Model: G 9000

Telescopic Lip 500 mm / 1000 mm

- NB Nominal width
- NL Nominal length
- V Telescopic lip extended
- VB Tapered lip
- L Total length (NL+V)
- O Service range up
- U Service range down
- H Closed height

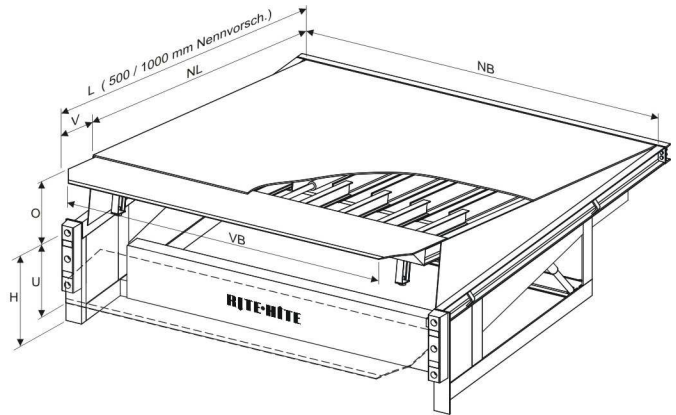

NL (mm)	V (mm)	L (mm)	O (mm)	U (mm)	H (H Iglu) (mm)
2000	500/900	2500/2900	350	350	620(720)
2500	500/1000	3000/3500	350	350	620(720)
3000	500/1000	3500/4000	400	400	720(820)
3500	500/1000	4000/4500	420	450	820(900)
4000	500/1000	4500/5000	400	500	900(900)
4500	500/1000	5000/5500	400	550	900(900)

Capacity 60kN Standard

NB (mm)	VB* (mm)	Tapered Lip (mm)
1500	1500	Option
1750	1750	Option
2000	2000	Option
2250	2000	2/125/190
2400	2000	2/200/340

VB* applies for all nominal length (NL)

Standard Features:

- CE certificated
- Compliant with EN 1398
- Anti-slip deck plate, tread plate
- U-channel hang-in frame
- Telescopic lip segment guided by 4 roller bearings
- Hydraulic emergency stop
- Automatic height adjustment
- Dock control, 400/230V, 24V secondary voltage
- Automatic stop after power failure or emergency stop
- Power cables adjusted to pit size
- Steel construction painted RAL 7016
- Yellow/black safety warning stripes
- Front curtain out of black PVC

Options:

- Dock control with automatic return
- Curb angle hang-in frame
- Flat steel hang-in frame
- Dock box
- RAL colour of choice
- Zinc-plated finish
- Weatherseals
- Foam insulation
- IGLU 1600 insulation – ISO panel
- Abrasive ramp surface
- Dock bumpers in various designs
- Bio hydraulic oil and low temperature oil

Other options available on request

Specifications subject to change without notice.

Project-related information: